
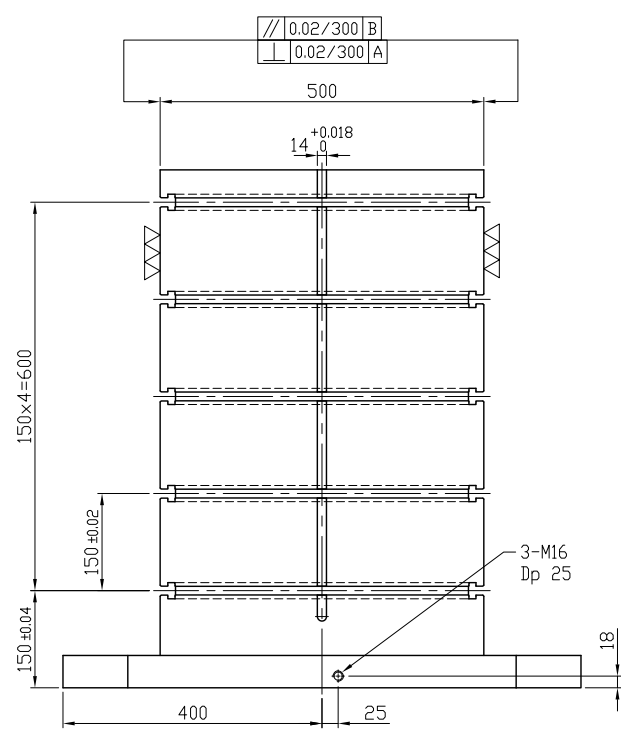


8-M16
Cap-Screw hole
(Figure A)

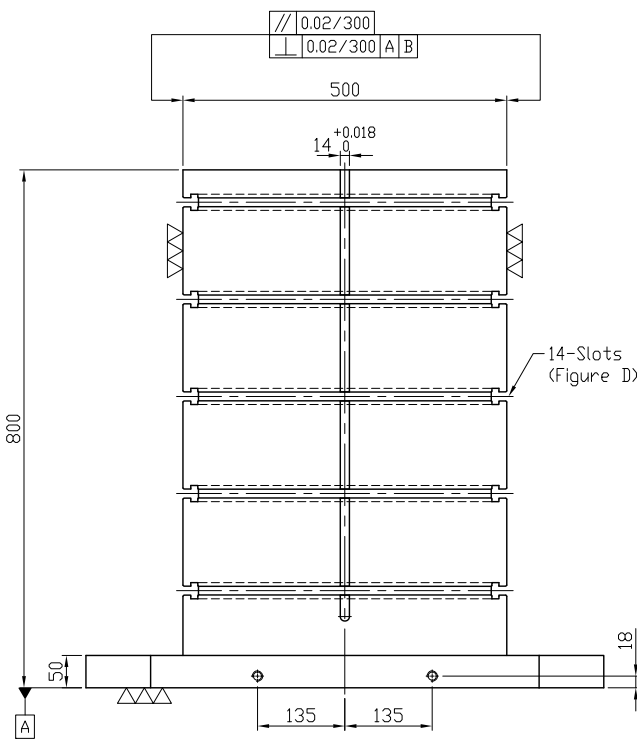


14-Slots
(Figure D)

3-M16
Dp 25

NW:570KG

*Edge chamfered C2

| | | | | | | | |
|---|------------|-------------------------------------|--------------------------------|--------------------|--------------|--------------|--|
| Material FC300 | | Heat treatment Annealing Process | | Surface treatment | | | |
| Drafted by S.C.H | Checked by | Approved by | Scale 1/1 | Date 2011.10.19 | Sheet 1/1 | Edition A | |
|  LEAVE INDUSTRIAL CO., LTD. | | | TITLE SQUARE TOOLING COLUMN | | | | |
| | | | DWGNO. BP09-800800-0800-14 | | | | |