




# BP30

## MC十字基座 CROSS TOOLING COLUMN

- 材質：FC30
- 熱處理：燒鈍
- 用途：適用於臥式MC
- 特長：以孔定位方式，利用標準化治具零件，可快速組立完成一套符合需求之治具。

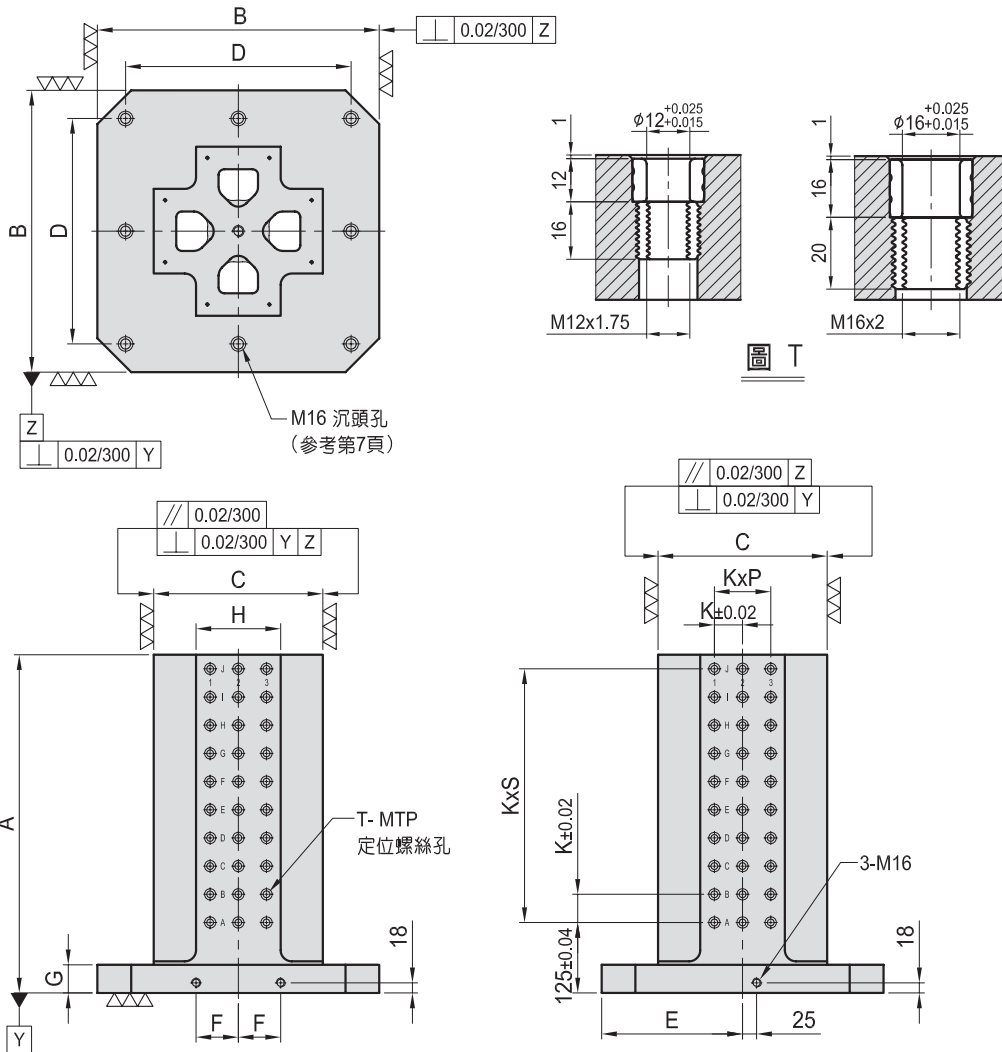

MODEL NO.	A	B	C	D	E	F	G	H	K	P	S	T	MTP	Mounting holes	kg
BP30-400400-0500-12	500														152
	400	250	320	200		55	50	125	50	1	7	$\phi 12$	M12	64	4
BP30-400400-0650-12	650													88	186
	500	300	400	250		75	50	150	50	2	9	$\phi 12$	M12	120	8
BP30-500500-0600-12	600													156	250
BP30-500500-0750-12	750													156	293
	500	300	400	250		75	50	150	50	2	12	$\phi 12$	M12	156	8
BP30-630630-0700-12	700													192	368
	630	350	500	315		100	50	200	50	3	11	$\phi 12$	M12	192	8
BP30-630630-0850-12	850													240	418
	630	350	500	315		100	50	200	50	3	14	$\phi 12$	M12	240	8
BP30-800800-0800-12	800													336	640
	800	500	640	400		135	50	300	50	5	13	$\phi 12$	M12	336	8
BP30-800800-1000-12	1000													432	740
	800	500	640	400		135	50	300	50	5	17	$\phi 12$	M12	432	8

MODEL NO.	A	B	C	D	E	F	G	H	K	P	S	T	MTP	Mounting holes	kg
BP30-400400-0500-16	500														151
	400	250	320	200		55	50	125	50	1	7	$\phi 16$	M16	64	4
BP30-400400-0650-16	650													88	184
	500	300	400	250		75	50	150	50	2	9	$\phi 16$	M16	120	8
BP30-500500-0600-16	600													156	247
BP30-500500-0750-16	750													156	290
	500	300	400	250		75	50	150	50	2	12	$\phi 16$	M16	156	8
BP30-630630-0700-16	700													192	364
	630	350	500	315		100	50	200	50	3	11	$\phi 16$	M16	192	8
BP30-630630-0850-16	850													240	413
	630	350	500	315		100	50	200	50	3	14	$\phi 16$	M16	240	8
BP30-800800-0800-16	800													336	633
	800	500	640	400		135	50	300	50	5	13	$\phi 16$	M16	336	8
BP30-800800-1000-16	1000													432	733
	800	500	640	400		135	50	300	50	5	17	$\phi 16$	M16	432	8

BP

BPA

BC

CP

SU

PT

SVF

ALV

OK-  
VISE

MITEE-  
BITE

JER-  
GENS

其他類

技術  
資料