




- 材質：本體 S45C
- 熱處理：本體 HRC 28°~32°
- 表面：染黑處理
- 用途：配合治具零件的組成，作支持工件之用
- 特長：支持黑皮面之工件，不易滑動

# PT46

## 六角齒面支持件 FEET(SERRATED END)

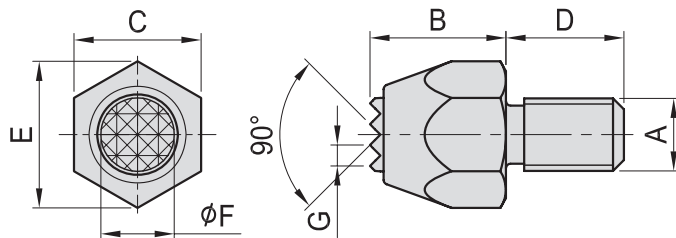

### 齒盤

- 材質：SKH9
- 熱處理：HRC 60°

### 齒盤

- 材質：錫鋼

MODEL NO.	A	B	C	D	E	F	G	kg
PT46-0610	M6	10	10	11	11.5	6.5	2.3	0.008
PT46-0620		20						0.013
PT46-0815	M8	15	14	13	16.1	8.1	2.3	0.018
PT46-0830		30						0.033
PT46-1020	M10	20	17	16	19.6	11.4	3.0	0.044
PT46-1040		40						0.080
PT46-1225	M12	25	19	20	21.9	13.0	3.0	0.070
PT46-1250		50						0.126
PT46-1630	M16	30	24	25	27.7	16.2	3.0	0.130
PT46-1660		60						0.230
PT46-2030	M20	30	30	25	34.6	25.2	3.0	0.200
PT46-2060		60						0.360

MODEL NO.	A	B	C	D	E	F	G	kg
PT46-0610-K	M6	10	10	11	11.5	6.5	2.3	0.008
PT46-0620-K		20						0.013
PT46-0815-K	M8	15	14	13	16.1	8.1	2.3	0.018
PT46-0830-K		30						0.033
PT46-1020-K	M10	20	17	16	19.6	11.4	3.0	0.044
PT46-1040-K		40						0.080
PT46-1225-K	M12	25	19	20	21.9	13.0	3.0	0.070
PT46-1250-K		50						0.126
PT46-1630-K	M16	30	24	25	27.7	16.2	3.0	0.130
PT46-1660-K		60						0.230
PT46-2030-K	M20	30	30	25	34.6	25.2	3.0	0.200
PT46-2060-K		60						0.360

SVF

ALV

OK-  
VISEMITEE-  
BITEJER-  
GENS

其他類

技術  
資料