


# SU29

## HARDENED SLICED PARALLEL


### SU29-S

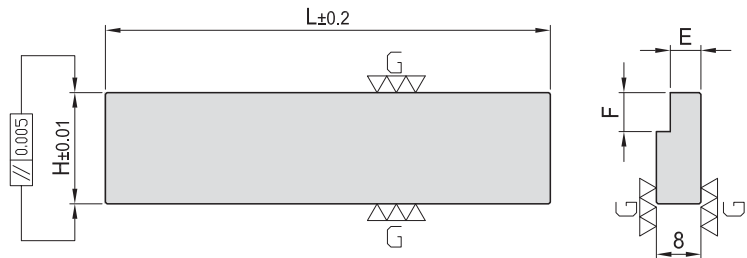

MODEL NO.	E	F	H	L	kg	MODEL NO.	E	F	H	L	kg
SU29-125S21	2.5	8	21	125	0.25	SU29-160S50	3.0	10	50	160	0.88
SU29-125S25			25		0.31	SU29-160S52			52		0.92
SU29-125S29			29		0.38	SU29-160S54			54		0.96
SU29-125S30			30		0.39	SU29-160S56			56		1.00
SU29-125S32			32		0.42	SU29-160S58			58		1.04
SU29-125S33			33		0.44	SU29-200S40			40		0.90
SU29-125S34			34		0.46	SU29-200S45			45		1.03
SU29-125S36			36		0.49	SU29-200S50			50		1.15
SU29-125S37			37		0.50	SU29-200S55			55		1.30
SU29-125S38			38		0.52	SU29-200S58			58		1.42
SU29-160S30	3.0	10	30	160	0.47	SU29-200S60	3.0	10	60	200	1.35
SU29-160S35			35		0.58	SU29-200S62			62		1.40
SU29-160S40			40		0.67	SU29-200S64			64		1.45
SU29-160S45			45		0.77	SU29-200S66			66		1.50
SU29-160S48			48		0.84	SU29-200S68			68		1.55

※ TWO PIECES PER PAIR!

### SU29-F

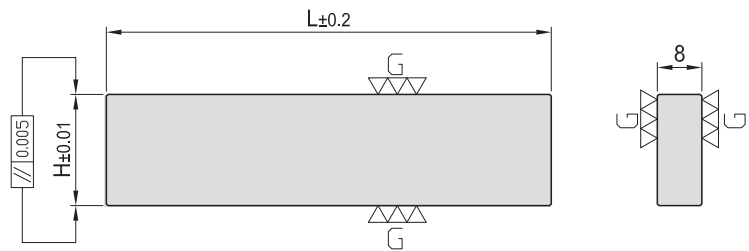

MODEL NO.	H	L	kg	MODEL NO.	H	L	kg
SU29-160F30	30	160	0.60	SU29-200F40	40	200	1.06
SU29-160F35	35		0.70	SU29-200F45	45		1.09
SU29-160F40	40		0.80	SU29-200F50	50		1.26
SU29-160F45	45		0.90	SU29-200F55	55		1.38
SU29-160F48	48		0.96	SU29-200F58	58		1.46
SU29-160F50	50		1.00	SU29-200F60	60		1.50
SU29-160F52	52		1.04	SU29-200F62	62		1.56
SU29-160F54	54		1.09	SU29-200F64	64		1.61
SU29-160F56	56		1.13	SU29-200F66	66		1.66
SU29-160F58	58		1.17	SU29-200F68	68		1.71

※ TWO PIECES PER PAIR!

- Material : S50C
- Heat treated : HRC 47°~52°.