
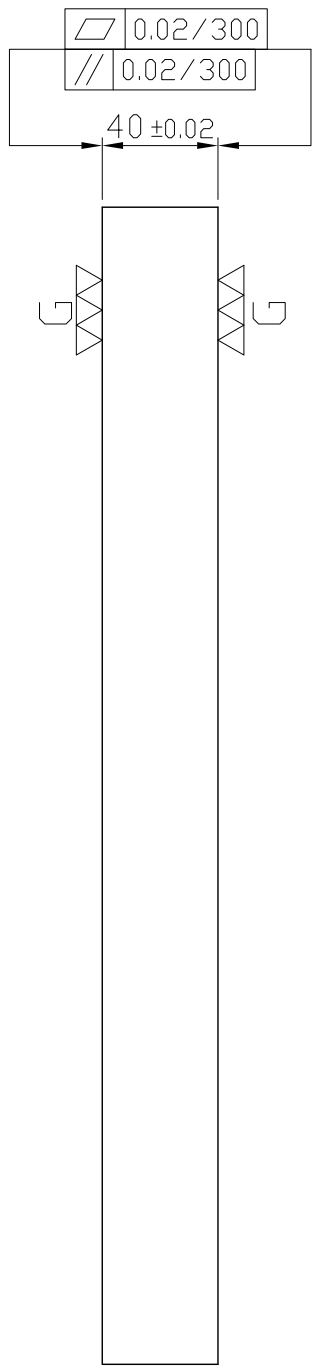
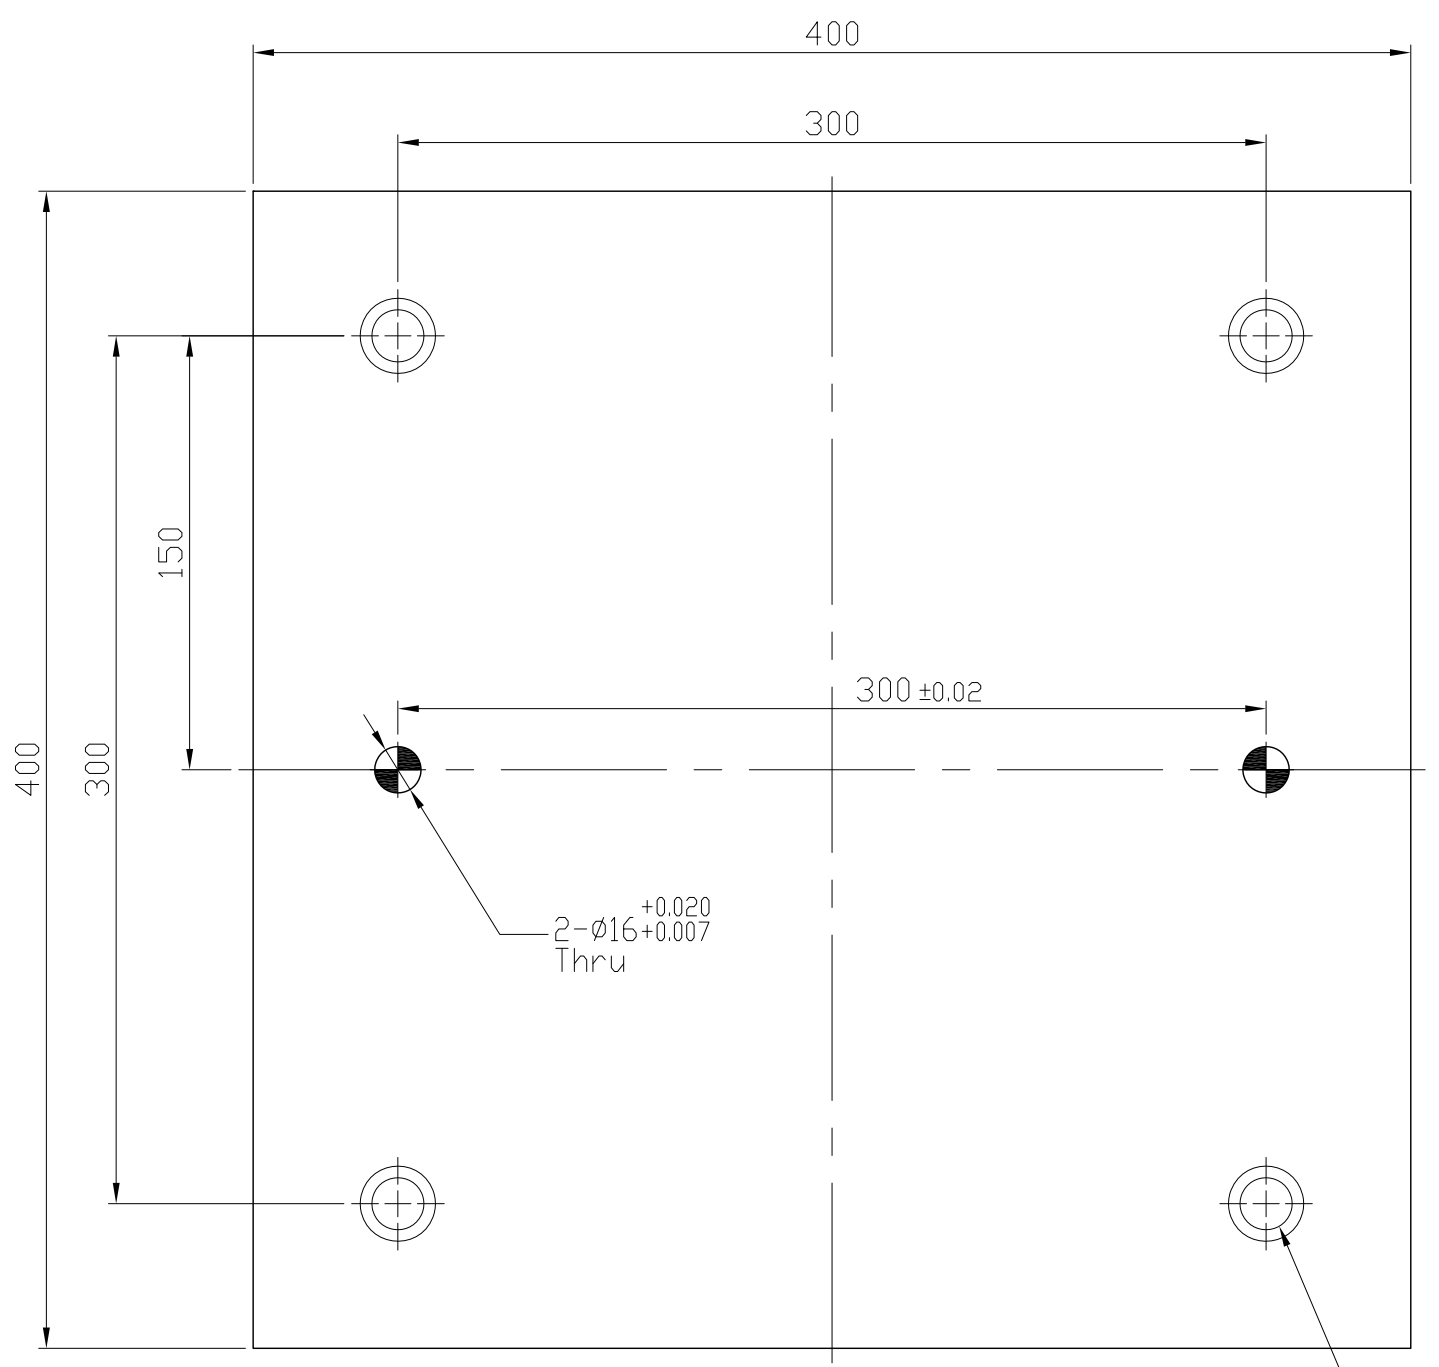


1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z
AA
AB



2-Ø16^{+0.020}/_{+0.007}
Thru

4-M16
Cap-Screw hole
(Figure A)

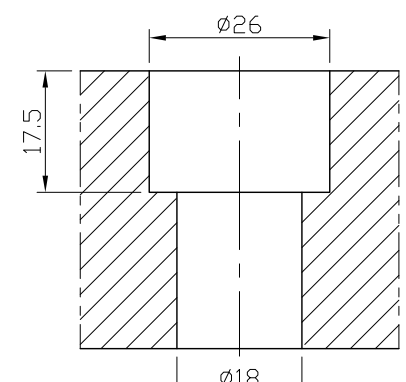


Figure A

*Edge chamfered C2

NW:47KG

Material FC300		Heat treatment Annealing Process			Surface treatment		
Drafted by S.C.H	Checked by	Approved by		Scale 1/1	Date 2012.01.12	Sheet 1/1	Edition A
			TITLE SUB-PLATE				
			DWG.NO. BP19-40400-0400-16				

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20